

## - MEASURES AND EXPLANATIONS

### NECK A / B

The padding materiel is placed, for the dog's comfort, at shoulder level and to distribute the force of traction.  
The harness size, around the neck, must be measured very precisely.


#### THIS MEASURE IS ESSENTIAL.

Measure from the withers to the top of the neck to the breastbone.  
Measure only one side of the dog as taking the entire contour of the neck in encircling the dog with the tape measure will risk the deformation of the reading of your measuring.

Apply the tape measure under the fur and tighten it.

**MEASURE THE DOG, NOT ITS FUR !!!**

Taken correctly, you should be able to slide two fingers in the "Y" under the neck (well adjusted) and touch the point of the breastbone.

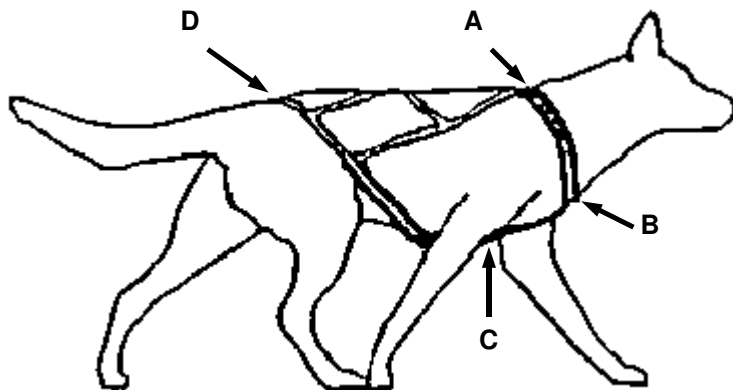

## FOR CONTROL

### BACK B / C / D

Place the "0" of the tape measure at the end of the breastbone (feel the point between the front legs), pass the tape measure between the front legs and pass along by the side of the thorax passing over the ribs to the base of the tail. You can feel with your fingers the junction tail/vertebral column, by lifting the tail.

### BACK = A > D

Place the "0" of the tape on the top of the neck, along the spine to the base of the tail.  
You can feel the tail / spine junction with your fingers, by lifting the tail.

### MAINTENANCE

When they are not being used, it is preferable to stock your harnesses in a dry place. They should be stocked in a temperate place to avoid freezing.

**NEVER dry over a fire or stove.** This would lead to an irreversible shrinking of 10% or more.

You can machine wash your harnesses, position 30° or in cold water and dry them by hanging them from the tail cord.

Do not use washing powder or other such products as the soap makes the harness "damp" and removes the protection products from the strap.